

LANDING VALVES



Landing Valves are used for fighting fire with water and accordingly mounted in fire hydrant systems at Internal or External places. The landing valves are sometimes also referred to as internal hydrants because they are usually fitted inside the buildings for wet hydrant systems.

* Kitemark & LPCB approved landing valves available upon request.



GENERAL SPECIFICATIONS

- Applicable Standards - BS 5041 - 1:1987
- Body - Copper Alloy to BS EN 1982
- Hand Wheel - Cast Iron to BSEN 1561
- Outlet - Female Instantaneous to BS 336 : 2010
- Working Pressure - 15 Bar (Max)
- Test Pressure - 22.5 Bar

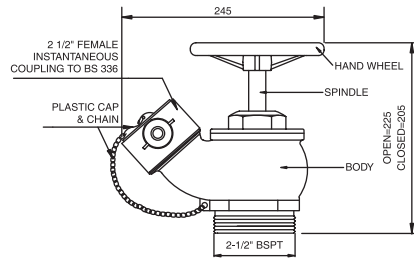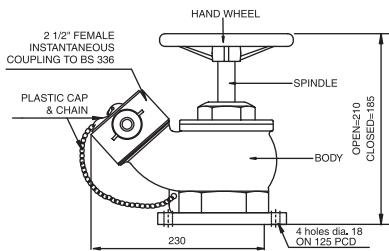



NDR 098

OBLIQUE LANDING VALVE

SPECIFICATIONS

Model No	NDR 098, Flanged Inlet, DN50 (to BS 4504 part 2:1974)
Model No	NDR 097, 2 1/2" Screw Thread Inlet to BS21

* Kitemark & LPCB approved landing valves available upon request.

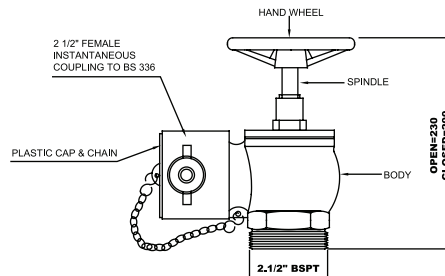
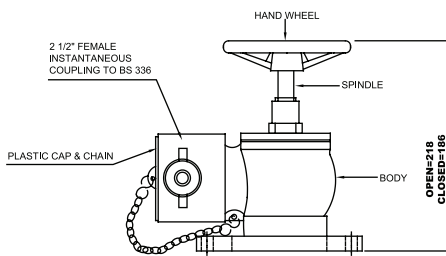


NDR 105

RIGHT ANGLE LANDING VALVE

SPECIFICATIONS

Model No	NDR 106, Flanged Inlet, DN50 (to BS 4504 part 2:1974)
Model No	NDR 105, 2 1/2" Screw Thread Inlet to BS21

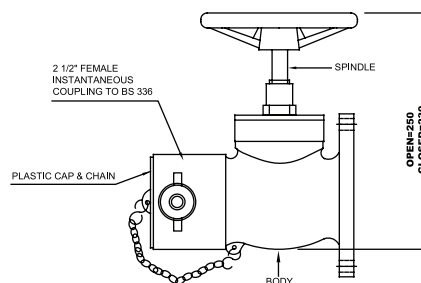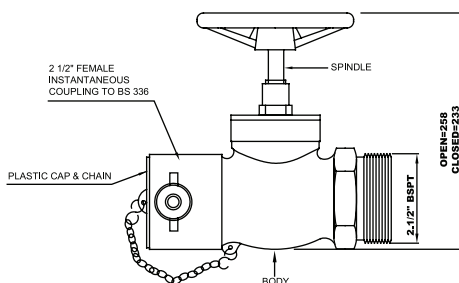

NDR 107

STRAIGHT THROUGH LANDING VALVE (Horizontal Type)

SPECIFICATIONS

Model No	NDR 108, Flanged Inlet, DN50 (to BS 4504 part 2:1974)
Model No	NDR 107, 2 1/2" Screw Thread Inlet to BS21