



Type	Model No.	Hose Diameter & Length	Reel Height (A in mm)	Reel Width (B in mm)	Reel Depth (C in mm)
Automatic (Plastic Nozzle)	19 NFH-040A/SS	19mm (¾") & 30m	625	550	220
Fixed (Brush / Mirror Finish)	25 NFH-040A/SS	25mm (1") & 30m	625	550	260
Automatic (Brass Chrome Plated Rotary Nozzle)	19 NFH-040A/SS-B	19mm (¾") & 30m	625	550	220
Fixed (Brush / Mirror Finish)	25 NFH-040A/SS-B	25mm (1") & 30m	625	550	260
Automatic (Plastic Nozzle)	19 NFH-040A	19mm (¾") & 30m	625	580	220
Fixed (Red Painted)	25 NFH-040A	25mm (1") & 30m	625	580	260
Automatic (Brass Chrome Plated Rotary Nozzle)	19 NFH-040A-B	19mm (¾") & 30m	625	580	220
Fixed (Red Painted)	25 NFH-040A-B	25mm (1") & 30m	625	580	260

## LOCK SHIELD VALVE

NAFFCO Lock Shield Valve is usually installed where unauthorized operation has to be avoided. A typical application of this valve is installing these at inlet pipe to the hose reel where it can be opened only by key and key kept by maintenance or fire safety department.

### FEATURES

- Solid Wedge, non-rising stem, screwed in bonnet.
- Valves are manufactured in accordance to BS 5154 series B.
- Service temperature -10 to +66°C.
- Pressure rating is PN 20.
- End connection is BSPT threaded to BS21.
- Material: Brass

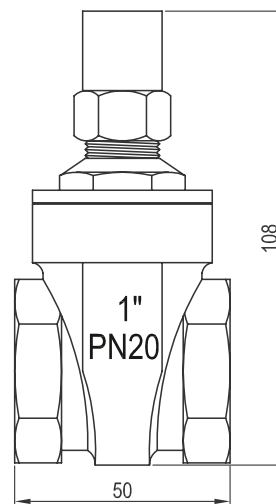

SPECIFICATIONS			
Model Number	Size (Inch)	Pressure Rating	Connecting
NLSV-25	1	PN 20	1" BSPT Female Threaded